

EUROPEAN MODEL

TWISTER

T2 TRIM SAVER

Maximize Profit Without Wasting Your Trim



Without Trim Saver
w/o Trim Saver



With Trim Saver
w/ Trim Saver



Trim Saver Features

- FDA approved stainless steel bin
- FDA approved lid & fasteners
- FDA approved silicone bin lid seal
- FDA approved silicone cyclone gaskets



EUROPEAN MODEL

TWISTER


T2 TRIM SAVER



CS-18 T2 TRIM SAVER SPECIFICATIONS	Product Number	23-10151A
	Input Voltage	230VAC, 50Hz
	Motor	3HP
	Amps (running)	12A
	Amps (startup)	20A
	Motor Speed	3450RPM
	Airflow Capacity	1400 CFM
	Static Pressure	12" W.G.
	Operating Conditions	950CFM @ 5" W.G.
	Impeller	13in / 330mm
	Hose Size	6in / 153mm
	Height	72in / 1.8m
	Weight	170lbs / 77kg
	Circuit Breaker Required	16A/240V
	Connector (plug)	CEE 7/7
	Sound Rating	85 dB(A)
Included Filter Bags	70 Micron, 40 Micron	
Certifications	CE	

T2 TRIM SAVER ACCESSORIES & COMPONENTS	40 Micron Bag	23-0101-00
	70 Micron Bag	23-0162-00
	6" Hose - 6' Long	23-0199-00
	6" Hose Cuff	23-0132-00
	Vacuum Bypass T2	23-0255-00
	Gasket (Stainless Bin Lid)	23-0244-00
	Gasket (10" separator for Cyclone)	23-0240-00
	Gasket (8" separator for cyclone)	23-0241-00
	Gasket (cyclone outlet)	23-0251-00
	Gasket (filter adapter)	23-0230-00
	Stainless Steel Bin & Upgrade Kit	23-0245-00
	Cyclone Cleaning Upgrade Kit	23-0264-00

ADDITIONAL REQUIREMENTS	Extension Cord
	12 AWG (Minimum AWG Size)
	7.6m / 25ft max length

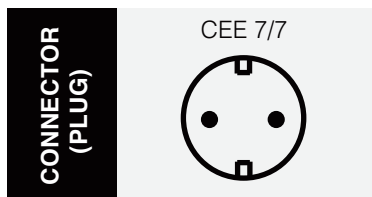

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.

